



Guzzler® Hand Pump GH-2600A / GH-2600B



- 20 GPM
- Available in aluminum (GH-2600A) or non-sparking bronze (GH-2600B)
- Accommodates 1-1/4" - 2" hose
- Stainless steel actuation
- Clamp ring adjusts to 6 different handle orientations
- Removable aluminum handle
- Universal handle converts quickly to either vertical (back-and-forth) or horizontal (up-and-down) operation



Pump in Bronze — GH-2600B



Performance

| | |
|-------------------------|--|
| Flow Rate | Per minute ¹ : 20 GPM (75L) Per stroke: 1.1 Qt (1.03L) |
| Max Lift | 12 ft (3.7 m) 22 ft (6.7 m with check valve) |
| Max Head | 30 ft (9.1 m) |
| Max Pressure | 15 psi (1.0 kg/cm ²) |
| Max Service Temp | 190°F (88°C) |

¹: at 72 cpm

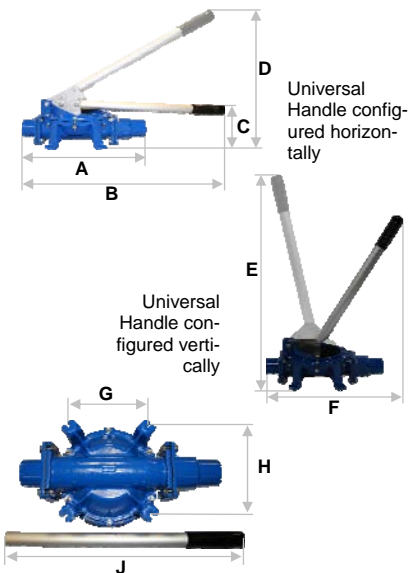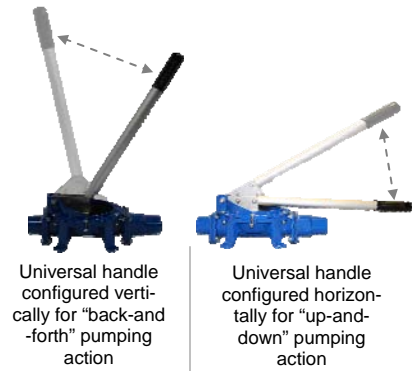

Specifications / Options

| | |
|---------------------------------|--|
| Body & Ports * | Epoxy-coated Aluminum (Blue), Bronze (Bronze) |
| Clamp Ring | Epoxy-coated Aluminum (Blue), Bronze (Bronze) |
| Handle | Aluminum: Universal Handle (Removable)/Silver |
| Valves * | Buna-N Flapper w/molded steel reinforcement plate |
| Diaphragm * | Buna-N Double Sided |
| Clevis/Button Assembly * | Stainless Steel |
| Other | Thru-Deck Mounting Kit (for vertically oriented handle only) |

* In contact with fluid

Available Ports

| | in | 1-1/4 | 1-1/2 | 2 |
|----------------------------|----|-------|-------|------|
| | cm | 3.18 | 3.81 | 5.08 |
| Hose (Smooth) | | | | S |
| NPT Female (Tapped) | | • | | |
| NPT Male (Threaded) | | | • | |


S Standard • Optional

Valve Options



Flapper — General purpose liquid transfer.

Universal Removable Handle

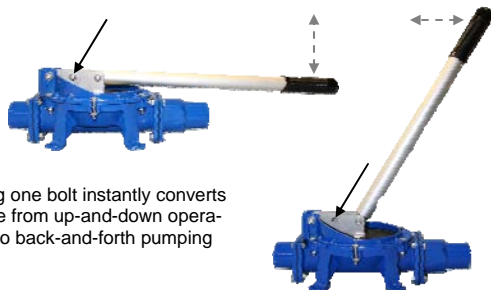

Moving one bolt instantly converts handle from up-and-down operation to back-and-forth pumping



Handle is removable for ease of stowing


| | in | cm |
|--------------------------|---------|--------|
| A | 14-3/4 | 37.5 |
| B | 25 | 63.5 |
| C | 4-1/2 | 11.4 |
| D | 20-3/4 | 52.7 |
| E | 25-1/4 | 64.1 |
| F | 21 | 53.3 |
| G | 5-3/4 | 14.6 |
| H | 6-3/8 | 16.2 |
| J | 18-1/4 | 46.4 |
| Mounting Holes | 1/4 | 0.64 |
| Weight (Aluminum) | 7.6 lb | 3.4 kg |
| Weight (Bronze) | 16.9 lb | 7.7 kg |

Guzzler® Hand Pump GH-2600A / 2600B



Example: GH-2600A-612-31-9090-00

- Guzzler Hand Pump
- Model style #2600A: Aluminum Body, Opposite Side Ports
- Aluminum Universal Handle (Silver) (configurable in either Horizontal or Vertical orientation)
- Buna-N Flapper Valves
- Buna-N Double-Sided Diaphragm
- Stainless Steel Clevis/Button Assembly
- Epoxy-coated Aluminum Clamp Ring
- Inlet: 2" Smooth
- Outlet: 2" Smooth
- No Spring

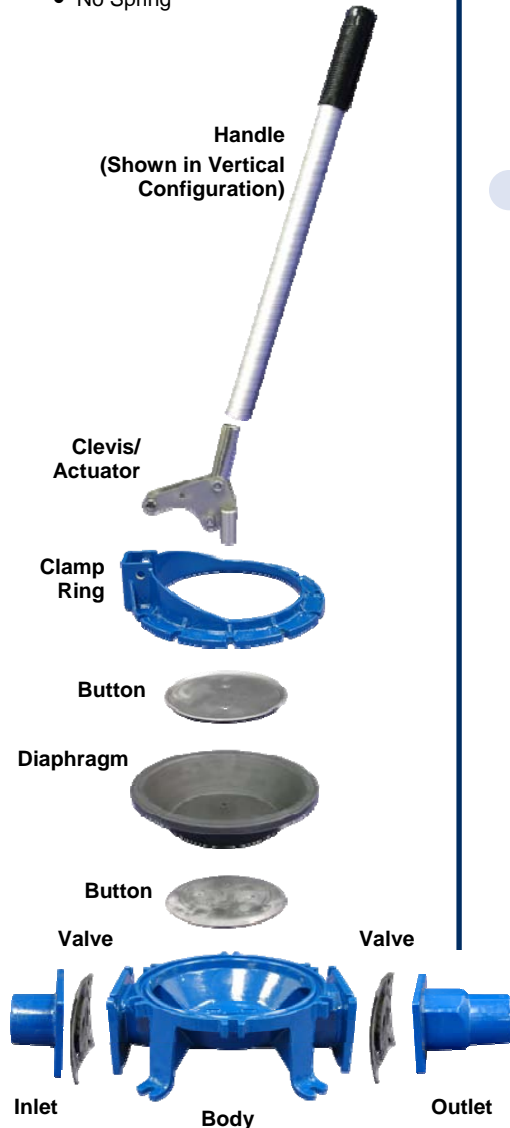

| Guzzler Product | |
|-----------------|------|
| Option | Code |
| Hand Pump | GH |

| Style (Family) | |
|-------------------------|-------|
| Option | Code |
| Alum., Opp. Side Ports | 2600A |
| Bronze, Opp. Side Ports | 2600B |

| Handle | |
|--------------------|------|
| Option | Code |
| Universal (Silver) | 6 |

| Valves | |
|------------------|------|
| Option | Code |
| Flapper (Buna-N) | 1 |

| Diaphragm | |
|------------------|------|
| Option | Code |
| Buna-N Dbl Sided | 2 |

GH - 2600A - 6 1 2 - 3 1 - 90 90 - 00

| Clevis/Button Assembly | |
|------------------------|------|
| Option | Code |
| Stainless Steel | 3 |

| Clamp Ring | |
|-------------------|------|
| Option | Code |
| Epoxy-coated Alum | 1 |
| Bronze | 2 |

| Option | Code | |
|--------------------|-------|--------|
| | Inlet | Outlet |
| 1-1/4" NPT Tapped | 71 | 71 |
| 1-1/2 NPT Threaded | 82 | 82 |
| 2" Smooth | 90 | 90 |

| Internal Spring | |
|-----------------|------|
| Option | Code |
| No Spring | 00 |