


MODELS: 33670-0010 33965-0000
 33683-0000 33980-0020
 33745-0000 34060-0010
 33760-0000 34060-0130
 33799-0000 34604-0000
 33840-0000 34668-0000
 33840-0010 44610-0000
33865-SERIES

PAR™ PRODUCT DATA

UTILITY HAND PUMPS

UTILITY HAND PUMPS

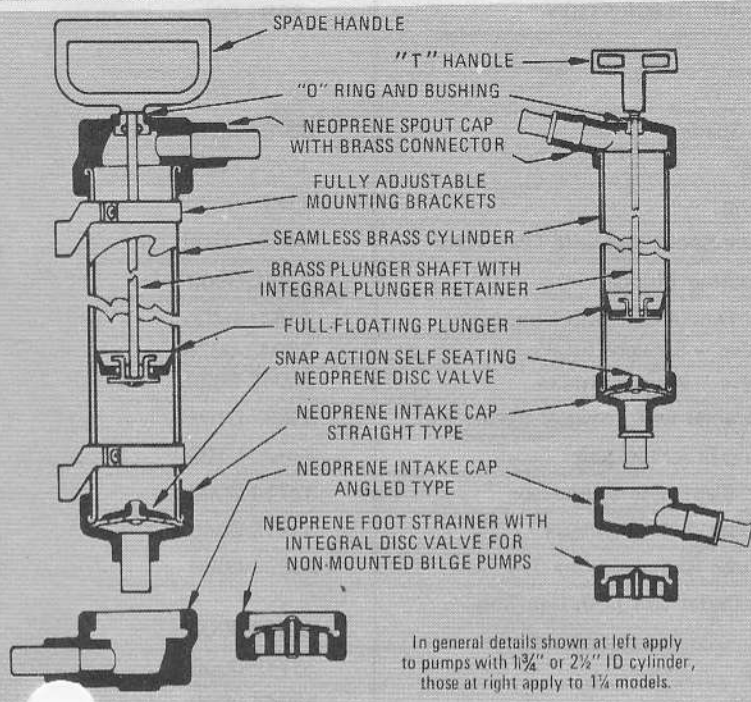

GENERAL INFORMATION

Pump more liquid with less effort with PAR hand pumps. PAR pumps never need coaxing or priming, full suction on the first stroke. Brass cylinders, high-quality oil resistant plungers, intake and discharge caps for long life. Pumps can be used in any position. Some models include hose(s) or adjustable mounting brackets. Available in many sizes with 2-1/2", 1-3/4" and 1-1/4" diameter cylinders. Uses include bilge pumping, oil draining, fuel transfer, and many other liquid transfer uses.

MAINTENANCE

To disassemble pump for cleaning and repair, pull handle out approximately 4" and place screwdriver carefully under bottom of spout cap and over outside of cylinder roll. Lift up on screwdriver and pry off spout cap. Pull out plunger shaft assembly. Lift full floating plunger off seat and clean between cup and seat. Remove intake cap in same way as spout cap. Take disc valve from cylinder and clean under neoprene flapper. Run rag through cylinder for cleaning.

To reassemble pump place disc valve in cylinder, snap intake cap back onto cylinder being sure undercut in cap is over cylinder roll. Insert plunger shaft assembly into cylinder and snap spout cap over cylinder roll.

Oil pump internally and spray with corrosion inhibitor or light oil for storage.

SPECIFICATIONS

| MODEL | STROKES PER GAL. | CYL. DIA. | STROKE LENGTH | OVERALL LENGTH | HOSE CONNECTION | HOSE SUPPLIED | WT. |
|--------------|------------------|-----------|---------------|----------------|-----------------|---|-----|
| 33670-0010 | 7 | 1-3/4" | 14" | 20-1/4" | 3/4" | NONE | 2.5 |
| 33683-0000 | 7 | 1-3/4" | 14" | 20-1/4" | 3/4" | 5' of 3/4" | 3.5 |
| 33745-0000 | 7 | 1-3/4" | 14" | 22-1/2" | 1" | NONE | 4.0 |
| 33760-0000 | 15 | 1-1/4" | 13" | 17" | 1/2" | 5' of 1/2" | 1.5 |
| 33799-0000 | 26 | 1-1/4" | 7-1/2" | 12" | 1/2" | 3' of 1/2" 40" of 5/16" 40" of 1/4" | 2.0 |
| 33840-0000 | 26 | 1-1/4" | 7-1/2" | 11-1/2" | 1/2" | NONE | 1.5 |
| 33840-0010 | 26 | 1-1/4" | 7-1/2" | 11-1/2" | 1/2" | 3' of 1/2" 2 ea 25" x 1/4" | 2.0 |
| 33865-SERIES | 40 | 1-1/4" | 4-5/8" | 10-1/4" | 1/2" | N.A. | 1.0 |
| 33965-0000 | 3 | 2-1/2" | 16" | 24" | 1-1/4" | NONE | 6.0 |
| 33980-0020 | 19 | 1-3/4" | 4-5/8" | 14-3/4" | 1" | NONE | 2.5 |
| 34060-0010 | 40 | 1-1/4" | 4-5/8" | 10-1/4" | 1/2" | 2' of 1/2" 40" of 1/4" | 1.0 |

SPECIAL PURPOSE PUMPS*

| | | | | | | | |
|------------|---|--|--|--|--|--|-----|
| 34060-0130 | Marine Engine Oil Drain Pump with 3/4" female garden hose fitting on suction connection for OMC and MerCruiser 3/4" NH Threaded Dip-Stick Tube. Includes 2 feet of 1/2" hose. | | | | | | 1.0 |
| 34604-0000 | Fueler pump with 3 feet of 1/2" suction hose and 5 foot discharge hose. | | | | | | 2.0 |
| 34668-0000 | Drain pump with 3 feet of 1/2" suction hose and 2 dipstick probes. | | | | | | 2.0 |
| 44610-0000 | Back pump, winter protection kit with 10' of 1/2" suction hose, 4' of 1/2" delivery hose and faucet adapter. | | | | | | 1.5 |

PERFORMANCE AND SPECIFICATIONS COMPARABLE TO MODEL 34060-0010.

ITT JABSCO

Rev. 8/80

UTILITY HAND PUMPS

| CYLINDER DIAMETER | | | PART DESCRIPTION | PART NO. |
|-------------------|-------------------|-------|--|------------|
| 1-1/4 | 1-3/4 | 2-1/2 | | |
| X | | | Handle "T" | 35416-0000 |
| | X | X | Handle Spade | 33785-0020 |
| X | | | Bushing | 33704-0000 |
| X | | | "O" Ring | 33721-0000 |
| X | | | Neoprene Spout Cap with Connector | 33631-0100 |
| X | | | Full Floating Plunger | 32450-0000 |
| X | | | Straight Intake Cap with Connector | 33631-0400 |
| X | | | Disc Valve - Straight Intake | 36042-0030 |
| X | | | Disc Valve - Angled Intake | 36042-0020 |
| X | | | Foot Strainer with Integral Valve | 33632-0100 |
| X | | | Mounting Brackets, pair | 33829-0100 |
| X | (33799-0000 Only) | | Adapter Boot with Connector | 33714-0000 |
| X | | | Draw Tube, 1/4" Diameter | 33815-0040 |
| X | | | Draw Tube Reducer 1/2 x 1/4 | 33857-0000 |
| X | | | Conical Collar (for both Can-Top pumps) | 34468-0000 |
| | X | | Bushing | 33749-0000 |
| | X | | "O" Ring | 33946-0000 |
| | X | | Neoprene Spout with Connector | 33729-0000 |
| | X | | Full Floating Plunger | 32264-0000 |
| | X | | Straight Intake Cap with Connector | 33741-0100 |
| | X | | Disc Valve (fits either straight or angled intake) | 36029-0000 |
| | X | | Foot Strainer with Integral Valve | 33671-0000 |
| | X | | Mounting Brackets, pair | 33822-0100 |
| | X | | Brass Plunger Shaft and Retainer (13-1/2") | 33784-0100 |
| | | X | "O" Ring and Bushing | 34334-0000 |
| | | X | Neoprene Spout Cap with Connector | 33947-0100 |
| | | X | Full Floating Plunger | 32911-0000 |
| | | X | Straight Intake Cap with Connector | 33948-0400 |
| | | X | Disc Valve (fits either straight or angled intake) | 33973-0000 |
| | | X | Mounting Brackets, pair | 33849-0100 |
| | | X | Brass Plunger Shaft and Retainer (14") | 33972-0100 |

ITT JABSCO

MARC Division
International Telephone and Telegraph Corporation
1485 Dale Way, Costa Mesa, California 92626
Telephone: (714) 545-8251